


# ELEVAH<sup>®</sup> 80-MOVE

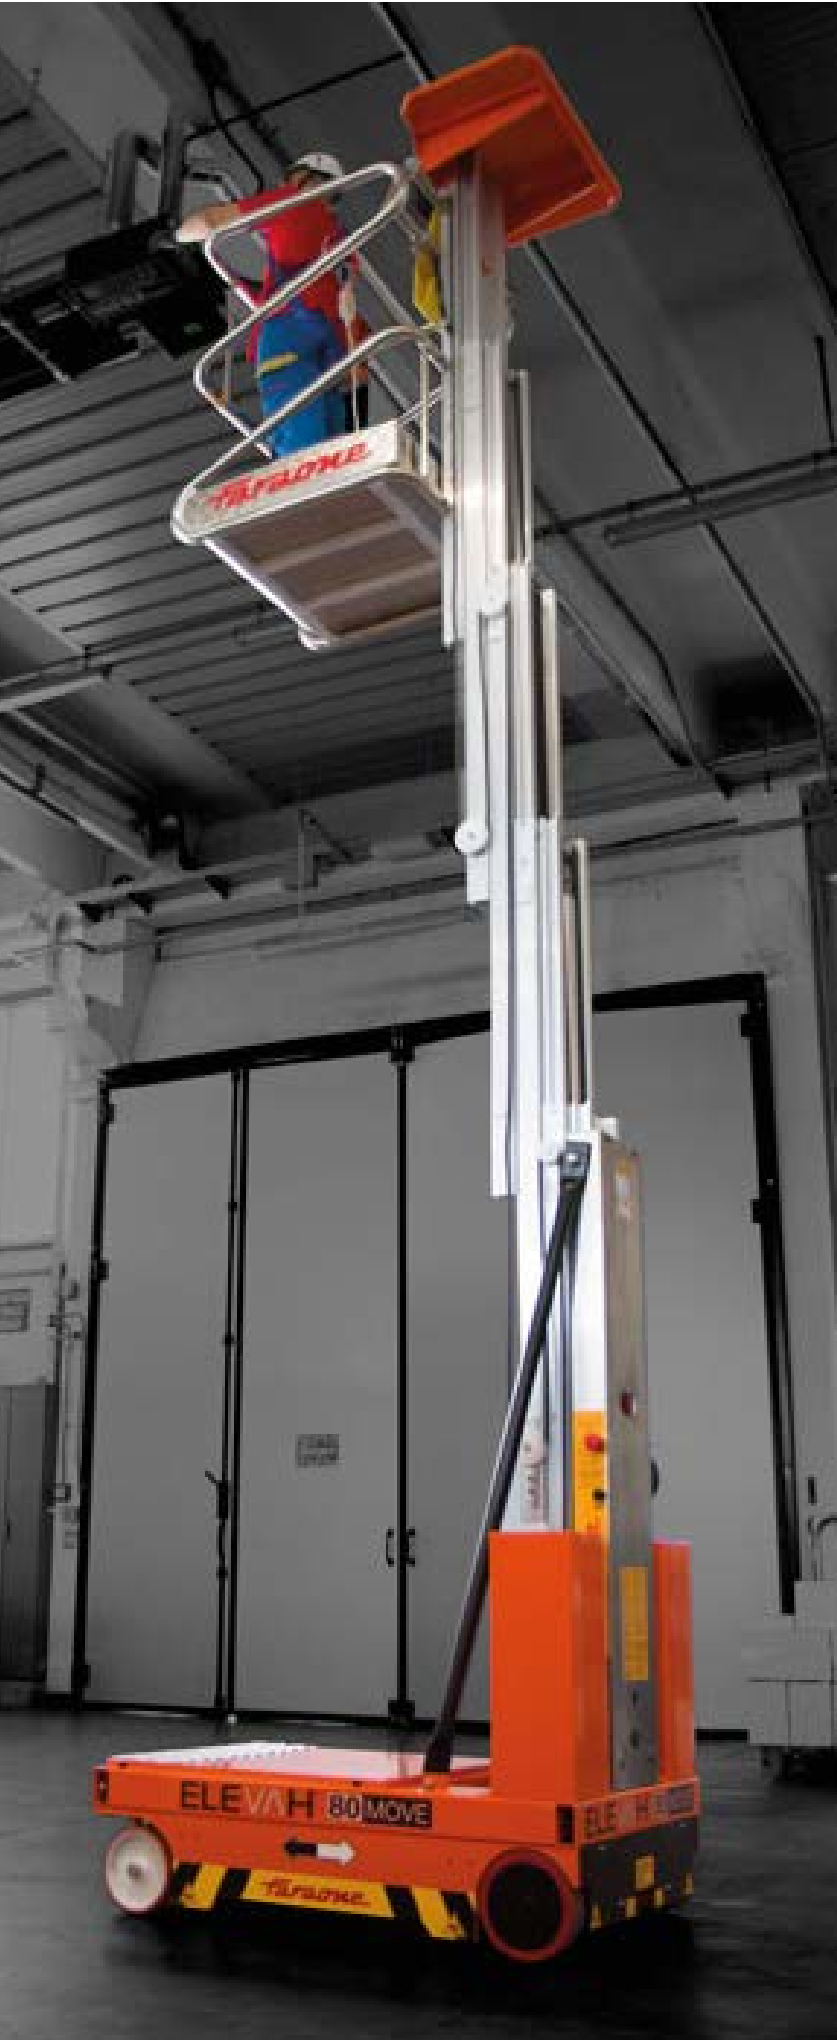





# ELEVAH® 80 MOVE

## Technical data

<b>Max. working height</b>		7,5 m
<b>Max capacity</b>		200 kg
<b>Number of people</b>		1
<b>Use</b>		Internal
<b>A</b>	<b>Closed machine height</b>	1990 mm
<b>B</b>	<b>Minimum platform height</b>	600 mm
<b>C</b>	<b>Maximum platform height</b>	5750 mm
<b>D/E</b>	<b>Base overall dimensions</b>	1280 x 780 mm
<b>F/G</b>	<b>Cage dimensions</b>	770 x 790 mm
<b>Machine weight</b>		750 kg
<b>H/I</b>	<b>Fixed picking tray dimensions</b>	740 x 440 mm
<b>Fixed picking tray capacity</b>		20 kg
<b>Drive wheels dimension</b>		Ø 220 x 65
<b>Swivel wheels dimensions</b>		Ø 200 x 50

## PERFORMANCE

<b>Power supply</b>		electrical
<b>Batteries</b>		Lead-Acid Batteries 12V 105 Ah
<b>Battery charger</b>		110V - 220V
<b>J</b>	<b>Maximum climbing ability</b>	15%
<b>Climbing ability at height</b>		2,5%
<b>Internal turning radius</b>		0
<b>External turning radius</b>		1095 mm
<b>Max. speed (rising – descending)</b>		0,2 m/s
<b>Maximum shifting speed (on the ground - at height)</b>		1 - 0,22 m/s
<b>K</b>	<b>Maximum pressure for wheel at full load*</b>	3,6 kN
<b>Work cycles ** (with fresh batteries)</b>		Ca. 130

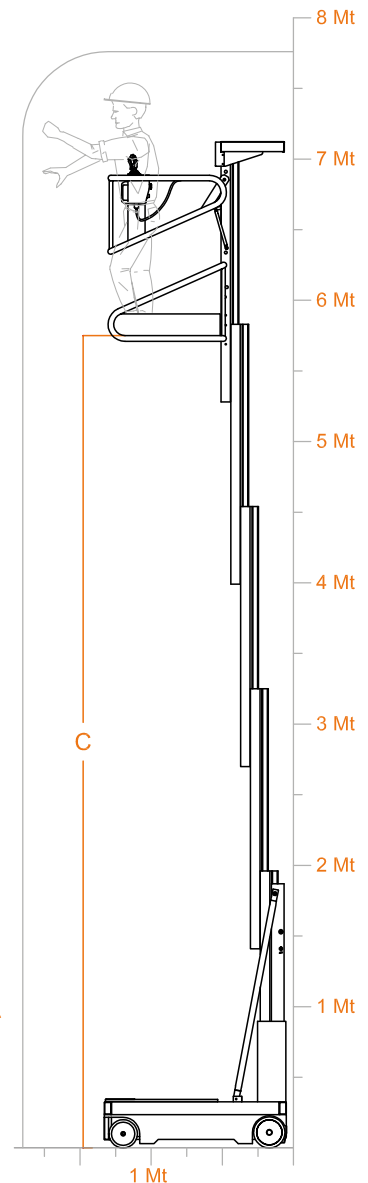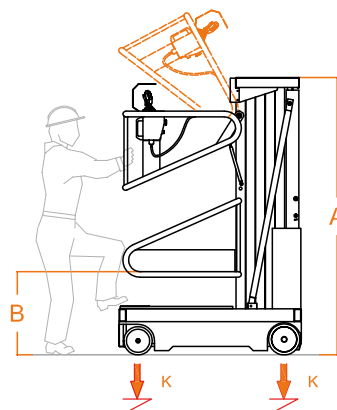

\* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

\*\* By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.



Conforme a la normativa EN280 y homologación para uso en interior en ausencia de viento.

Operating temperatures  
from -15 ° to +40 ° C