



KL35.8T

Products



KL35.8T - A tele wheeled loader that sets new standards

The Kramer KL35.8T tele wheeled loader is a compact and manoeuvrable tele wheeled loader ideal for many applications in agriculture. With an optimized power to weight ratio, low shipping weight and continuous high payload, the efficiency of this model series offers many benefits to end users.

- Fully-fledged wheel loaders with extra reach as well as stacking and dumping height
- One-piece frame and all-wheel steering
- Hydraulic quick-hitch system and parallel-controlled loading system
- Particularly spacious panoramic cab with the highest level of operator comfort
- Efficient drive system, low operating costs and high variety of options




Technical specifications

Operating data	
Bucket capacity	0,95 m ³
Operating weight	5.850 kg
Engine / Motor	
Engine / Motor manufacturer	Deutz
Engine performance (standard)	55,4 kW
Engine performance (option)	74,4 kW
Emission standards stage (standard)	IIIB
Emission standards stage (option)	IV
Power transmission	
Driving speed (standard)	20 km/h
Driving speed (option)	40 km/h
Standard tires	14.5-20
Differential lock	100 % front and rear
Max. steering angle	2 x 40 °
Steering and operating hydraulics	
Max. pump discharge capacity	84 l/min
Max. pump pressure	240 bar
Max. Powerflow discharge capacity	120 l/min
Kinematics	
Design system	Z-Kinematics
Tipping load	3.500 kg
Payload	2.300 kg
Tilt-in angle	40 °
Tip-out angle	40 °
Filling capacities	
Fuel tank	120 l
Hydraulic oil tank	64 l
Vibrations	
Total vibrations value of the upper body extremities	< 2,5 m/s ²
Highest effective value of weighted acceleration for the body	< 0,5 m/s ²

Weitere technische Daten finden Sie in der ausführlichen Broschüre im Bereich Infomaterial



Dimensions

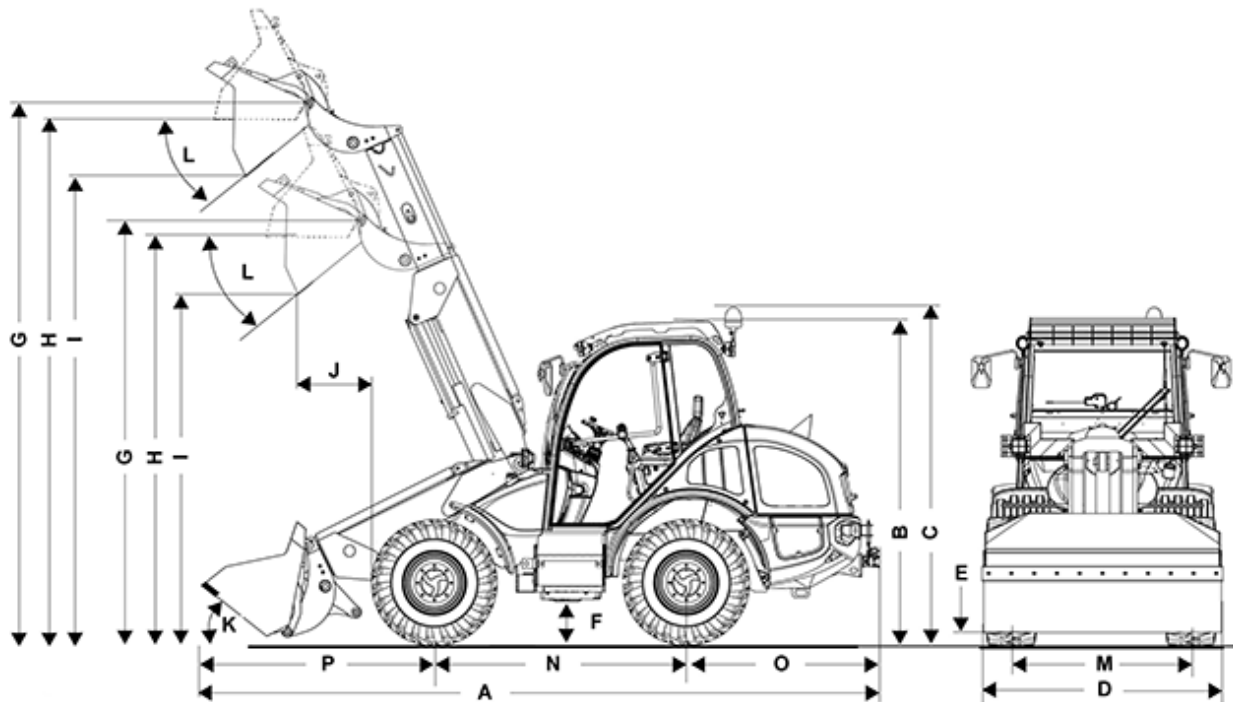

A	Length (Schaufel mit Zähne)	6.040 mm
B	Height	2.750 mm
C	Total height with rotating beacon	2.990 mm
D	Width	1.920 mm
E	Ground clearance in transport position of the loading installation	270 mm
F	Ground clearance under axle and gearbox	350 mm
G	Bucket pivot point - retracted	3.622 mm
G	Bucket pivot point - extended	4.672 mm
H	Overhead loading height - retracted	3.392 mm
H	Overhead loading height - extended	4.442 mm



I	Dumping height - retracted	2.922 mm
I	Dumping height - extended	3.972 mm
J	Dump reach - retracted	648 mm
J	Dump reach - extended	1.108 mm
K	Tilt-in angle	40 °
L	Tip-out angle	40 °
M	Track width	1.400 mm
N	Wheelbase	2.150 mm
O	Center of rear axle to end of vehicle	1.620 mm
P	Center of front axle to tip of teeth	2.270 mm
	Bucket width	1.950 mm
	Stack height (arm extended)	4.500 mm
	Turning radius over tyres	2.950 mm

Alle Angaben wurden mit folgender Bereifung ermittelt: 28 x 9.00 – 15

Please note

that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions.

Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2017 Kramer-Werke GmbH.