

IXOLIFT® 400



Workplace safety
- a choice
for you to make.

IXOLIFT® 400

A safe and smart alternative
to ladders and scaffolds.



ADJUSTABLE WORK PLATFORM

PATENT PENDING

- Simple and safe to use
- Working height up to 4 meters
- Gas spring powered, easy to operate
- Safety compliant alternative to ladders
- Compact sized, easy to move around alone
- Automatic anti-surfing brakes for extra safety
- Eco friendly, hydraulic oil free, maintenance free

TECHNICAL SPECIFICATIONS	IXOLIFT 400W	IXOLIFT 400S	IXOLIFT 400WS
Working height	3974 mm		
Max working load	150 kg		
Max platform height	1974 mm		
Min platform height	974 mm		
Platform size	526 x 556 mm		
Stowed height	1970 mm		
Stowed length	1198 mm		
Stowed width	728 mm		
Max length with stabilisers out	N/A	1500 mm	
Max width with stabilisers out	N/A	1668 mm	
Classification	INDOOR RATED		OUTDOOR RATED
Total weight	228 kg	140 kg	239 kg
Compliance	Machinery Directive 2006/42/EC and EN 280/2013 & EN 1004/2004 standards		



CE




Compact size



Safety compliance



Gas spring powered

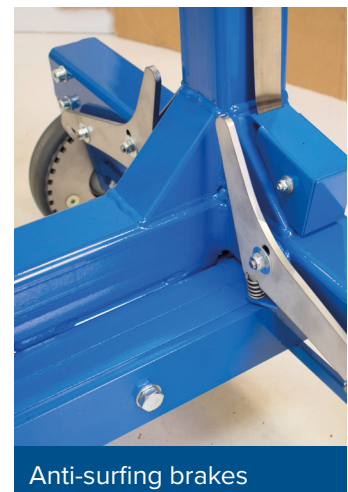

Anti-surfing brakes