

KL31.5 Products



The down-to-earth performer

The new 5 Series models feature simple operation, compact design and manoeuvrability. Even in the economy class, the rigid frame and the all-wheel steering provide you with all the Kramer benefits such as constant payload, stability and manoeuvrability.

- Undivided frame and all-wheel steering for constant payload, stability and manoeuvrability
- The 5085T features a hydraulic quick-hitch system and a loading system as well as Z kinematics.
- Spacious newly developed cab with superb all-round visibility
- Efficient high-pressure drive system for low operating costs and high thrusting force
- Diverse options provide versatility



Technical specifications


O	perating	data
_	001011119	

operaning actual	
Bucket capacity (standard bucket)	0,75 m ³
Operating weight	4.100 kg
Engine / Motor	
Engine / Motor manufacturer	Yanmar
Engine performance	35 kW
Power transmission	
Travel speed	20 km/h
Standard tires	12.5–18
Steering and operating hydraulics	
Flow rate (pump)	52 l/min
Pressure (maximum)	210 bar
Kinematics	
Tipping load (with standard bucket)	3.150 kg
Payload (S = 1.25)	1.900 kg

Weitere technische Daten finden Sie in der ausführlichen Broschüre im Bereich Infomaterial



Dimensions

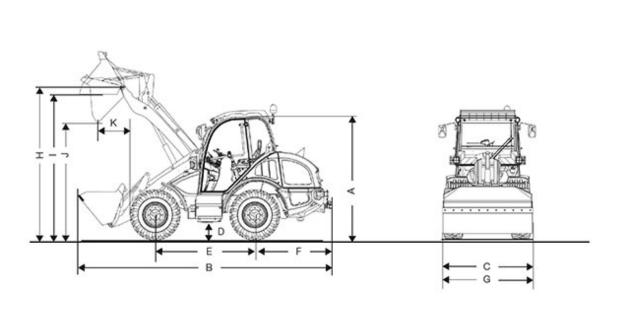

А	Height	2.450 mm
В	Length	5.080 mm
С	Width	1.720 mm
D	Ground clearance	300 mm
Е	Wheelbase	2.020 mm
	Center of front axle to tip of teeth	1.570 mm
F	Center of rear axle to end of vehicle	1.490 mm
G	Bucket width	1.750 mm
Н	Bucket pivot point	3.065 mm
I	Overhead loading height	2.915 mm





J	Dumping height	2.400 mm
K	Dump reach	650 mm
	Stack height	2.800 mm
	Turning radius Tyres	2.840 mm

Alle Angaben wurden mit folgender Bereifung ermittelt: 28 x 9.00 – 15

Please note

that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions. Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2017 Kramer-Werke GmbH.